olivetti

PRAXIS 20

PORTABLE TYPEWRITER

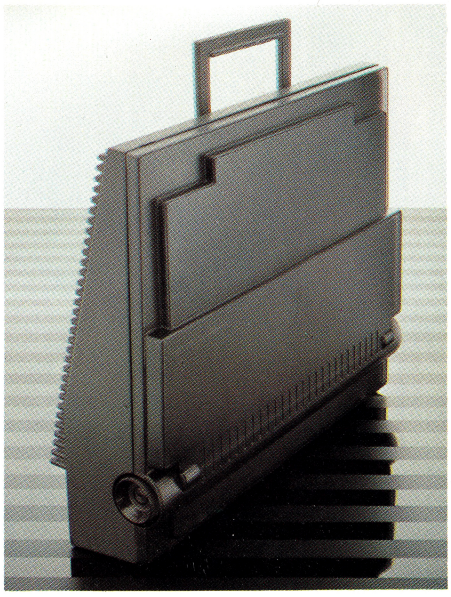

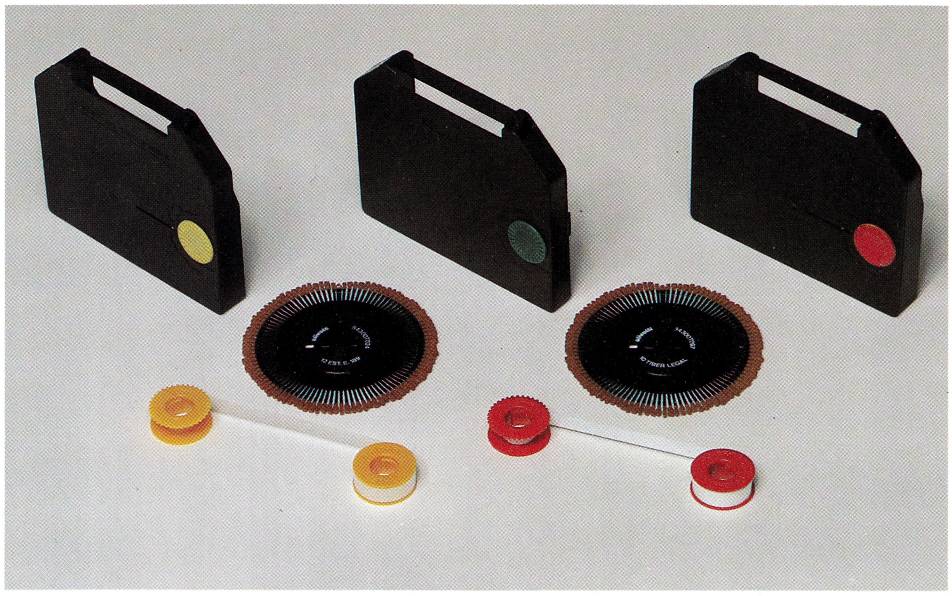

PORTABLE ELECTRONIC TYPEWRITER

Automatic correction memory
Correction device
Interchangeable daisywheel printing element and ribbon cartridge

KEYBOARD

Alphanumeric and service keys:
44 alphanumeric keys, with 100 characters, and 14 function keys.
REPEAT key for repetitive use of any key.
2 shift keys.
Shift lock.
Automatic repeating space bar.
Automatic repeating line space and printhead return key.
Tabulation setting key.
Tabulation clear key.
Tabulation setting key with vertical ruling.
Alphabetical listing key.
Cancellation key.
Automatic repeating backspace key.
Righthand margin setting key.
Lefthand margin setting key.
Margin release key.

Selectors

Vertical spacing selector
3 positions:
☐ 1, 1½, 2 spacing.

Keyboard selector key

KBI - for using the national keyboard.
KBII - for using the second keyboard (special characters, in addition to the national keyboard, for typing in foreign languages.

INDICATORS

Machine switched ON (red light).
Upper case indicator (yellow light).
Audible end-of-line signal.

AUTOMATIC CORRECTION

Automatic correction memory with a capacity of 19 characters.
Any of the last 19 characters printed can be corrected automatically.

PRINT UNIT

Speed: approx. 8 cps.
Stationary carriage: max paper width 12".
Length of printing line: 9".
The following controls are situated on the upper part of the casing:
☐ movable paper guide
☐ paper release wheel
☐ vertical spacing release wheel.
Graduated scale for setting margins and tabulation stops.

Print ribbon

Interchangeable cartridge type.
3 types of ribbon available:
texturized nylon, carbon and correctable carbon.

Corrector ribbon

Capacity: approx. 1,100 characters,
2 types available:
☐ LIFT-OFF, for use with correctable carbon ribbons
☐ COVER-UP, for nylon or ordinary carbon ribbons.

Printing element

Single interchangeable daisywheel element.
Variety of typefaces available, depending on the horizontal spacing used (1/10" or 1/12").

Auxiliary services and devices

ON/OFF switch.
Standard line format when the machine is switched on.
Type impact control.

Casing

Made of ABS resin, with integral carrying case and handle underneath the keyboard.

Electrical specification

Mains voltage: 115 or 220 V.
Frequency: 50 or 60 Hz.

Dimensions and weight

Width: 15.20" (380 mm)
Height: 7.52" (118 mm)
Depth: 13.08" (327 mm)
Weight: 13.86 lbs. (6.3 kg).

DOCUTEL olivetti CORPORATION
Docutel/Olivetti Corporation
155 White Plains Road
Tarrytown, NY 10591-9990

79638 Printed in USA 7-83